WINGITS® Standard Stainless Steel Grab Bar

Model: WGB6

Part Numbers:

WGB6SS12

12" Satin Finish

WGB6SS16

16" Satin Finish

WGB6SS18

18" Satin Finish

WGB6SS24

24" Satin Finish

WGB6SS30

30" Satin Finish

WGB6SS32

32" Satin Finish

WGB6SS36

36" Satin Finish

WGB6SS42


42" Satin Finish

WGB6SS48

48" Satin Finish



- All parts are Stainless Steel tubing is 18-gauge (1.2mm)
- Mounting Flanges are 3"(75mm) in diameter, 3/32"(2.5mm) thick, HeliArc welded to the tubing. Mounting Flanges have 5 holes for attachment to WINGITS or adequate blocking.
- Snap-On Flange Covers are 22 gauge (0.8mm) drawn stainless steel, 3"(76mm) in diameter and 3/8"(10mm) in height.
- Provide 1-1/2" (38mm) clearance from wall.



MECHANICAL DATA

Width: See product part number for width. Complete length of Grab Bar is usable surface.

Diameter: 1.5" (3.8cm)

PRODUCT COMPOSITION

Entire product is stainless steel.

MODALITY

Use: Wall Installation.

Load Capability: 800 lbs (362.9kg)

INSTALLATION

WINGITS® Structural Stainless Steel Grab Bars are designed to hold live loads and must be installed into adequate structural blocking or with WINGITS® Grab Bar Fasteners

CERTIFICATIONS


WINGITS® Structural Stainless Steel Grab Bars meet or exceed the applicable requirements of all building codes, ADA criteria, and 2010 ADAAG and 2009 ANSI standards.

RECOMMENDED INTEGRATION

For hollow wall construction, it is recommended that **WingIts**® Grab Bar Fasteners are used with this product. See Fastener instructions for applications.

20140822 rev3

WINGITS®

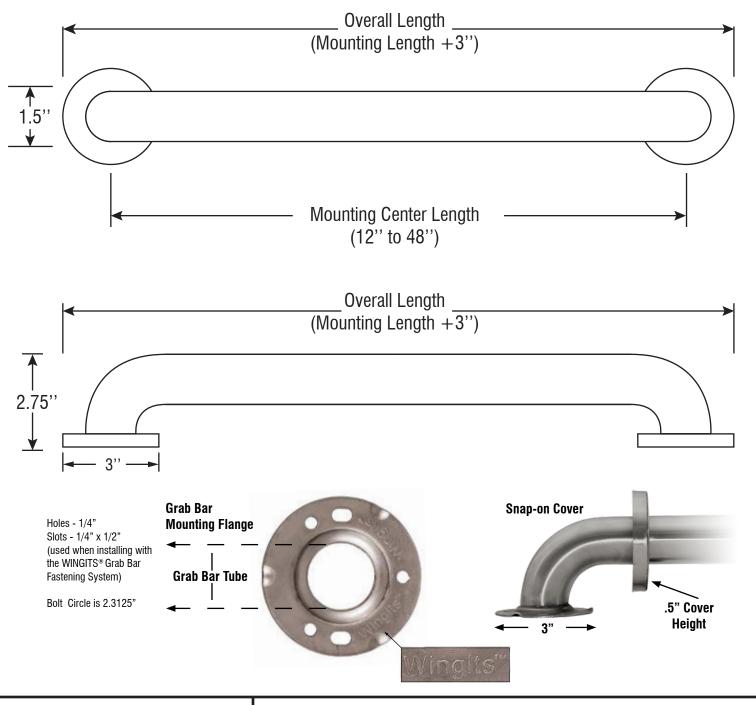



Stainless Steel Screws x 6

OPTIONAL HARDWARE (Sold Separately)







RES Winglts (RESGBW35) x 2